

Impact Ball IB01

FOR IMPACT SOUND INSULATION MEASUREMENTS



Scope of delivery of the Impact Ball
(Bag and Meter included)

The IB01 Impact Ball is a lightweight, easy-to-use, and professional impact source for impact sound insulation measurements as described in ISO 16283-2:2020-11 for buildings as well as ISO 10140-5:2021 for laboratory applications.

The Impact Ball is very well suited to simulate low-frequency sound events, such as those caused by footsteps or children jumping on wooden beam ceilings.

APPLICATIONS

- Building acoustics
- Measuring the impact sound insulation of floors and stairs
- In situ and laboratory measurements
- The Impact Ball is dropped vertically from a height of 1 m (± 1 cm) at several positions, the Sound Pressure Level is measured in the receiving room
- Evaluation of Measurements and Reports by Sound Insulation Reporter software


Features

- Low-frequency excitation
- Human activities' representation
- Efficient for environment with excessive background noise
- Easy-to-use
- Lightweight

Technical Specifications


Material	Silicone
Dimensions (Diameter)	$\varnothing 180$ mm (± 1 mm) / 7.08" (± 0.04 ")
Weight	2.5 kg / 5.51 lb
Rebound coefficient	0.8 (± 0.1)
Rubber hardness	40 Shore A (± 0.5)
Temperature range	-10 ° to 40 °
Order Information NTi Audio #	600 000 560

IMPACT FORCE EXPOSURE LEVEL

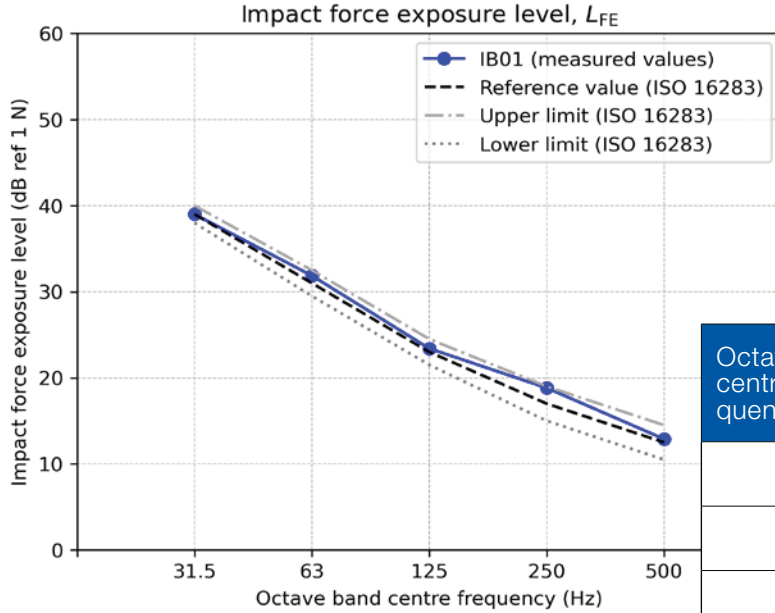

Octave band centre frequency [Hz]	Impact force exposure level Limits [dB]	Impact force exposure level measured [dB]
31.5	39.0 ± 1.0	39.0
63	31.0 ± 1.5	30.9
125	23.0 ± 1.5	23.4
250	17.0 ± 2.0	18.8
500	12.5 ± 2.0	12.9

IMPACT FORCE WAVEFORM

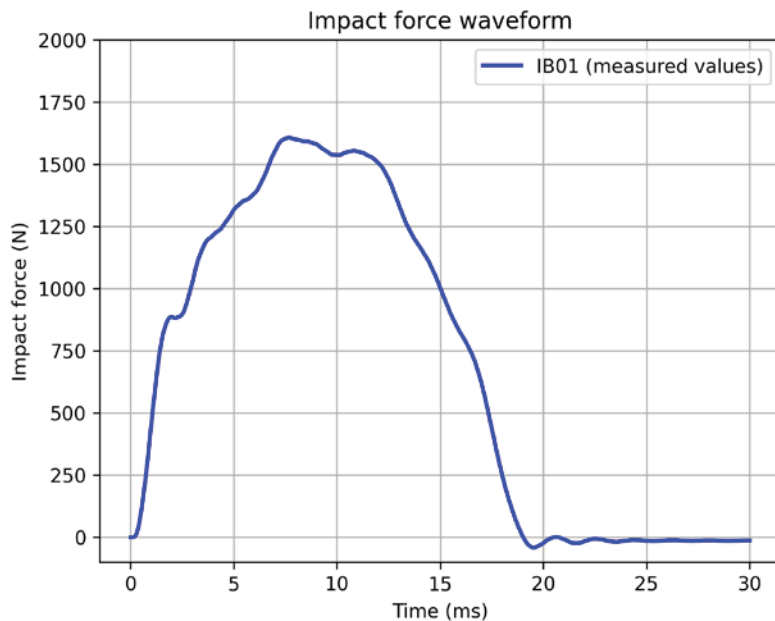

DISTRIBUTOR CONTACT:
CALTRON PTE LTD
 email: caltron@caltron.sg
www.caltron.sg